

OVX-6400

6400VA DC/AC INVERTER

GENERAL FEATURES:

- Sine wave output voltage
- Suitable for motors control
- Adjustable output frequency
- Adjustable output voltage
- Input voltage according to:
 - EN50163: 2006
 - EN50124-2: 2017
- High input-output isolation 5400Vrms
- Remote off opto-coupled
- Alarm by isolated relay contacts
- Configurable input: Reverse or Mid power
- Remote control via RS232
- CAN BUS
- Railway applications according to EN61287-1
- Fire and smoke: EN45545-2 pending



	Input voltage	Output voltage	Output power
OVX-6400-7701	400 ...900 Vdc	400 V three phase	6 kW 6.4 kVA 8 kWpk



INPUT	
Nominal DC input voltage	600/750Vdc
Minimum DC input voltage	400V
Maximum DC input voltage	900V continuous 2800Vdc according to EN50124-2=2017 4.2.2 and Annex A
Input voltage standard	EN50163 (Supply voltage of traction systems)
Inrush current	15A
OUTPUT	
Output type	AC 3ph
Output Voltage	400V
Voltage tolerance	5±%
Output voltage range	20...100% of Vout (adjust via remote control)
Output frequency	50 / 60Hz via DIP-switch, 5...75Hz via RS-232
Maximum continuous current (Irms)	9.24A
Maximum peak current 5s (Irms)	11.5A
Continuous active / apparent power	6000W / 6400VA
Peak active / apparent power 5s	8000W / 8000VA
Load regulation	< 4.5%
Line regulation	< 2%
Output wave distortion THD	< 2% (average of 16 samples)
Output HF ripple	< 2.5%
ENVIRONMENTAL	
Storage temperature	-25 ... 80°C
Operating ambient temperature:	
Full load	-25 ... 55°C, 70°C 10 min (SU3 class, according to EN61287-1)
62.5% load	-25 ... 70°C
Relative humidity without condensation	5 ... 95% with no condensation
Maximum Altitude	2000m at full load, 2500m at 95% of load
Cooling	Internal forced air controlled
Environmental regulations	RoHS & Reach according to directive 2011/65/EU
Shock and vibration	EN61373 pending
EMC	
Immunity according	EN61000-6-2, EN50121-3-2
Emissions according	EN61000-6-4, EN50121-3-2
SAFETY	
Safety according to	EN50124-1 Railway app. (Insulation coordination)
Dielectric strength: Input /output	5400Vac / 50Hz / 10s
Dielectric strength: Output / Earth	1500Vac / 50Hz / 1min
Dielectric strength: Input / Earth	5400Vac / 50Hz / 10s
Pollution degree	PD2
Overvoltage category	OV3
Fire and smoke	EN45545-2 pending
RELIABILITY	
MTBF	>150.000h @40°C according to SN29500
Service life	20 years
Life cycle	20 years
MECHANICAL	
Dimensions (H x W x D mm)	85,8 x 372 x 450,3
Weight	< 12000 g
Shock and Vibrations according to	EN61373 Category 1 class B body mounted



Protection degree

IP20

PROTECTIONS

Against overloads

Current and I²T limited (see overload protection curve)

Against over-temperature

Shutdown with auto-recovery

CONTROL

Output OK LED

Green

Input OK LED

Green

Alarm LED

Red

Input alarm

Open when alarm. Maximum rating: 0.16A at 160Vdc

Output alarm

Open when alarm. Maximum rating: 0.16A at 160Vdc

Remote OFF input


Off applying 15...143 Vdc, Impedance >35kΩ

Configurable input (reverse or mid-power)


ON: applying 15...143 Vdc, Impedance >35kΩ



BLOCKS DIAGRAM

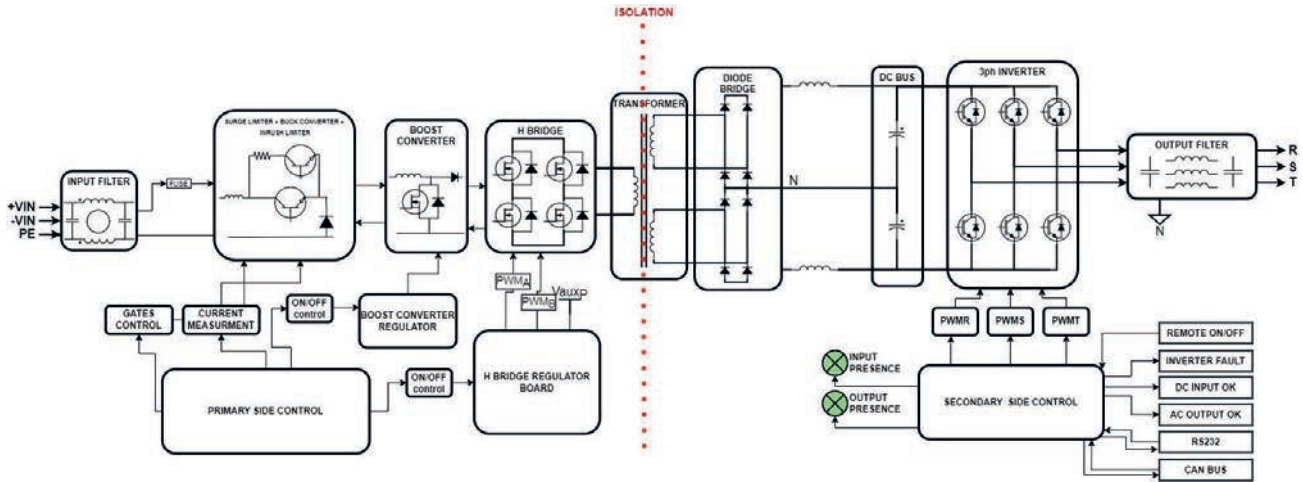

CONNECTIONS

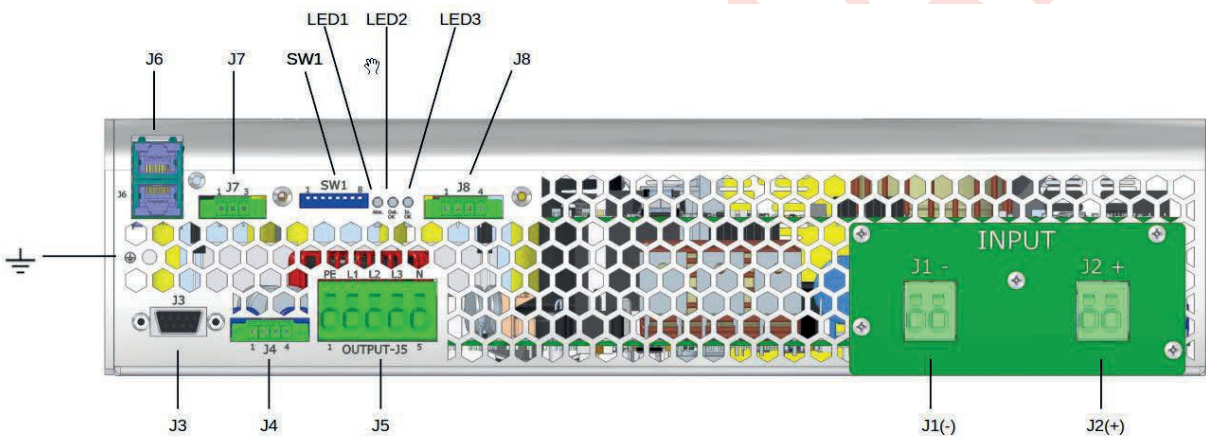

J1	-Vin	Spring clamp terminals cables 2.5 ... 4mm ²
J2	+Vin	
J5 - 1	Protective Earth	
J5 - 2	Output R	
J5 - 3	Output S	Phoenix Contact MC1.5/4-GF-3.81 Recommended female: Phoenix Contact MC1.5/4-STF-3.81
J5 - 4	Output T	
J5 - 5	Output Neutral	
J4 - 1	+ Configurable input	
J4 - 2	- Configurable input	Phoenix Contact MC1.5/4-GF-3.81 Recommended female: Phoenix Contact MC1.5/4-STF-3.81
J4 - 3	+ Remote	
J4 - 4	- Remote	
J8 - 1	Status output	
J8 - 2	Status output	Phoenix Contact MC1.5/3-GF-3.81 Recommended female: Phoenix Contact MC1.5/3-STF-3.81
J8 - 3	Status input	
J8 - 4	Status input	
J7 - 1	CAN L (optional Can bus)	
J7 - 2	CAN H (optional Can bus)	Female D-Sub DB9
J7 - 3	GND CAN	
J3	RS-232	RJ45
J6A - J6B	Optional Parallel operation	



DESCRIPTION


The OVX-6400 is a three-phase sine-wave DC-AC inverter designed not only to work within 400 to 900V input voltage range but also to withstand surges and over-voltages as described in EN50124-2.

The unit allows:

- Changing the output frequency by means of DIP-switch-7 of SW1. OFF: 50Hz or default programmed, ON: 60Hz
- Change local/remote (waiting RS-232 commands) by means of DIP-switch-6 of SW1. OFF: local, ON: remote
- Shutdown applying voltage output 15 to 143V on pins 3 and 4 of J4
- Start-up motors by means of a soft start. In the start-up, the output voltage rises linearly from 0V to set voltage and the frequency from the initial to the set one. The start-up ramp slope may be changed via RS-232
- Set the rotation speed of a motor according to the appropriate Voltage/Frequency ratio.
- Configurable input (pin 1 and 2 of J4):
 - Reverse mode: Changing the rotation direction for the next start-up of a motor by applying voltage between 15 and 143V.
 - Mid power mode: Changing the output frequency in V/F mode from nominal to a mid-power frequency by applying voltage between 15 and 143V.
- Monitoring the status of the input and output voltage through the contacts of two separate solid state relays.
- Set and monitor parameters via RS-232, CAN BUS.

The OVX-6400 is equipped with a maximum average power protection as well as maximum output peak current protection. This protects the semiconductors even when an output short-circuit occurs. It also features a disable function for input under-voltage, which allows protecting the batteries from harmful discharges.

POWER DERATING vs AMBIENT TEMP.

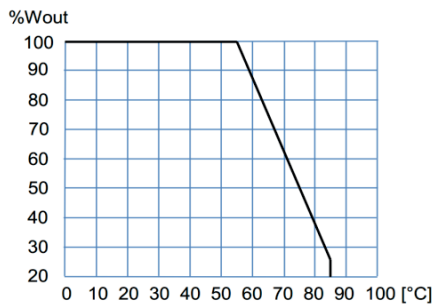

START-UP

- The unit has 6 threaded holes for the fixation on a mounting surface.
- The unit has internal fans. For an appropriate cooling, the air input and output should be free of elements that cause and an air flow reduction (minimum recommended distance to other objects 90mm).
- Make connections as shown in the figure.
- The default output frequency is 50Hz. For 60Hz simply actuate the dip-switch as indicated in the figure.

For safety reasons, the following requirements must be met:

- Provide the equipment with some kind of protective enclosure that complies with the electrical safety directives in effect within the country where the equipment is installed.
- Include an input fuse with a rating immediately higher than the maximum input current.



RS232 communication port

It is possible to control and monitor the unit via RS232 by means of a terminal emulator like "Tera Term" or "Putty". Also it is possible to control and monitor the unit directly using the protocol showed in table:


Protocol configuration: ASCII code, 57600 bauds, parity none, 8 bits, 1bit stop

Header	Function	Parameter	Returns	Explanation		
P	L	V	PTV####	Input voltage in Volts		
		v	PTv####	Input voltage ripple in Volts		
		Y	PTYRN=#### [13]YSN=#### [13]YTN=####	Output voltage in Volts RMS Phase-Neutral ([13]= char 13 of ASCII code)		
		I	PTIR=####[13]IS=#### [13]IT=####	Output current in Amps RMS ([13]= char 13 of ASCII code)		
		T	PTT####	Internal temperature1 in K		
		t	PTt####	Internal temperature 2 in K		
		F	PTF####	Nominal output frequency in Hz		
		f	PTf####	Actual output frequency in Hz		
		y	PTy####	Actual output voltage set-point in V		
		S	PTS####	Inverter state 999.9 → Enabled 000.0 → Disabled 222.2 → Blocked by overload 111.1 → Blocked by overload or shortcircuit		
		M	PTM####	Model number		
		R	PTR####	Firmware version		
		Other	PTE	Command not supported		
	G	1	####	OK / ERR	Set the low input voltage timed shutdown in V	
		2	####	OK / ERR	Set the minimum alarm input voltage in V	
		3	####	OK / ERR	Change the status bit (after start up enabled with SW3 =LOCAL and disabled with SW3 =REMOTE) 999.9 → Inverter enabled 000.0 → Inverter disabled	
		4	####	OK / ERR	Set the output voltage Phase-neutral in Vrms (Vo)(output must be stopped) 040.0 ≤ #### ≤ 230.0	
		5	####	OK / ERR	Set the maximum output current in Arms 20% I _{nom} ≤ #### ≤ 100% I _{nom}	
		6	####	OK / ERR	Set the nominal output frequency in Hz (Fo) (output must be stopped) 005.0 ≤ #### ≤ 075.0	
		7	####	OK / ERR	Set the alarm maximum output current 0 < #### ≤ 100% I _{max_warning}	
		8	####	OK / ERR	111.1 → Reset the inverter	
		L	####	OK / ERR	Set the minimum input starting voltage in Volts	
		O	####	OK / ERR	Set the initial frequency in the startup (Fi) 005.0 ≤ #### ≤ 075.0	
		P	####	OK / ERR	Set the ramp-up in increment of "N" cycles per Hz in mode V/F, frequency changes or start-up (Note-1) 001.0 ≤ #### ≤ 100.0	
		Q	####	OK / ERR	Set the ramp-down in decrement of "N" cycles per Hz in mode V/F (Note-1) 002.0 ≤ #### ≤ 100.0	
		Y	####	OK / ERR	Change the working mode of the input J4-1,J4-2 111.1 → Input as reverse phase control (default) 222.2 → Input as mid-power control (Note-2)	
	M	X	####	OK / ERR	Set the mid-power frequency for V/F mode by the use of input J4-1,J4-2 005.0 ≤ #### ≤ 75.0	
		1	####	OK / ERR	Set a new output frequency in Hz (output must be run and not stored in memory) 005.0 ≤ #### ≤ 075.0	
		2	####	OK / ERR	Set a new output voltage in Volts (output must be run and not stored in memory) 040.0 ≤ #### ≤ 230.0	
		3	####	OK / ERR	Set a new output frequency in Hz in mode V/F (output must be run and not stored in memory) 005.0 ≤ #### ≤ 075.0	
			4	####	OK / ERR	Changes the output phase order (output must be run and not stored in memory) 111.1 → Phase RST (direct phase) 222.2 → Phase SRT (reverse phase)


OTHER PORTS PENDING



Note 1:

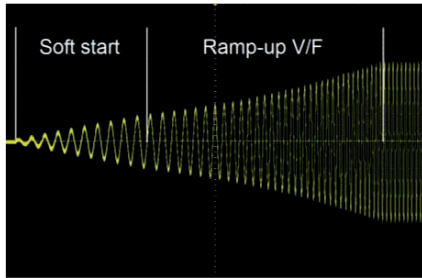


Example for N=1: start-up time = N x 1.7s for changes from 16Hz to 50Hz

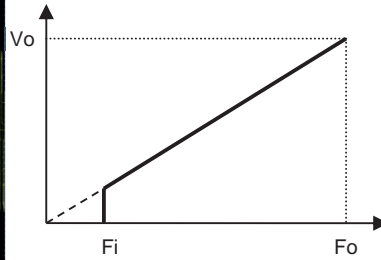

Mode V/F curve

Note 2:

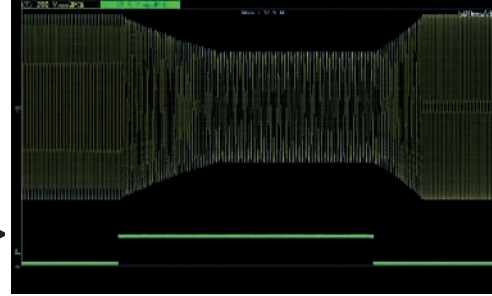

Example for change from 50Hz / 400V to 30Hz and 240V with ramp-down of 2 cycles /Hz and ramp-up of 1 Cycle/Hz. Yellow: output voltage and Green: Mid-Power input signal


WORKING PARAMETERS

Thermal protection		
Internal warning temperature (output alarm)	88	°C
Internal shutdown temperature	92	°C
Internal restart temperature	75	°C
Internal temperature of fan start-up	45	°C
Input voltage parameters		
	750Vdc	
High input voltage instantaneous shutdown	1300>	Vdc
High input voltage timed shutdown (t)	1270 - 1080	Vdc
Time to shutdown (t)	Controlled via temperature measurement	
Start-up voltage	390	Vdc
Low input voltage instantaneous shutdown	370	Vdc
Time to shutdown (t)	500m	s
Output voltage parameters		
<u>Output voltage</u>	400 (line to line)	Vac
Output under-voltage shutdown	< 85% of setting 1000ms	
Warning voltage (output alarm)	< 90% of setting 200ms	
<u>Initial start-up frequency</u>	5	Hz
Soft start duration	1 cycles	
<u>Ramp-up V/F</u>	1 Hz/cycle	
Output current parameters		
<u>Maximum continuous output current</u>	9.24	A
<u>Warning current (output alarm)</u>	8.8	A
Maximum overload I ² t	See figure below	
Time between restart attempts	4000	ms
Number of attempts of consecutive overload	5	
Working failures and reset		
Lock for continuous overload or internal failure	Unlimited time	
Reset time by input disconnection	> 2	min

Configurable parameters underlined




OVERLOAD PROTECTION

Protection against overloads and short-circuits	By current limiting at I _{opk} By I ² t. The unit shutdowns when the current-time is over the continuous operation curve
Overload protection recovery	Every 4 seconds after shutdown, the unit tries to restart up to 5 times. If the overload persists, the unit remains shutdown until an input reconnection .

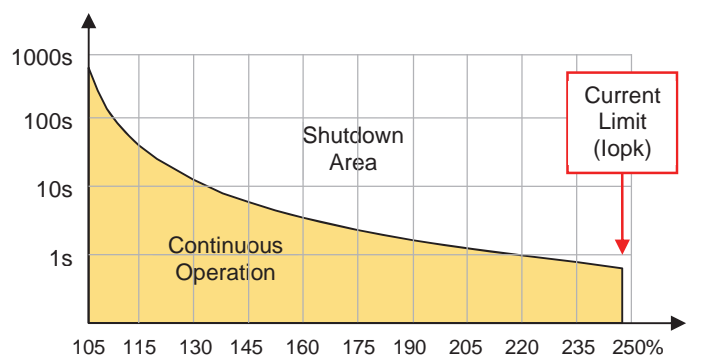




DIMENSIONS

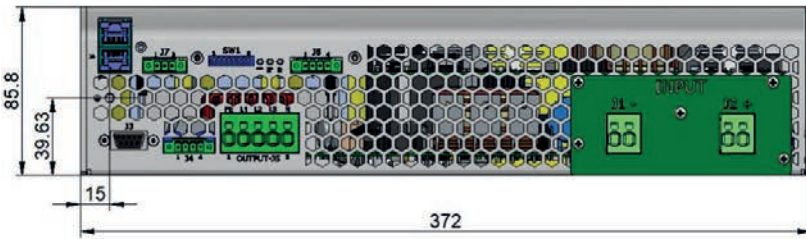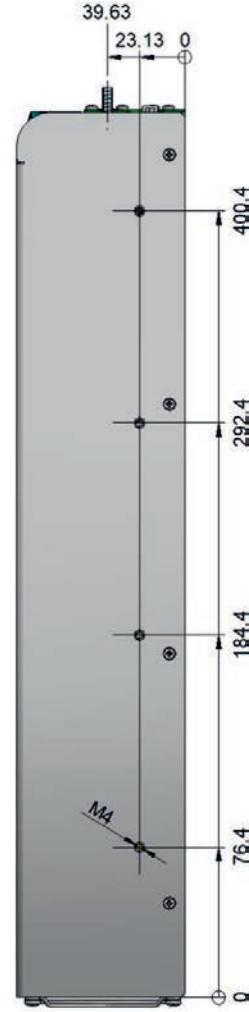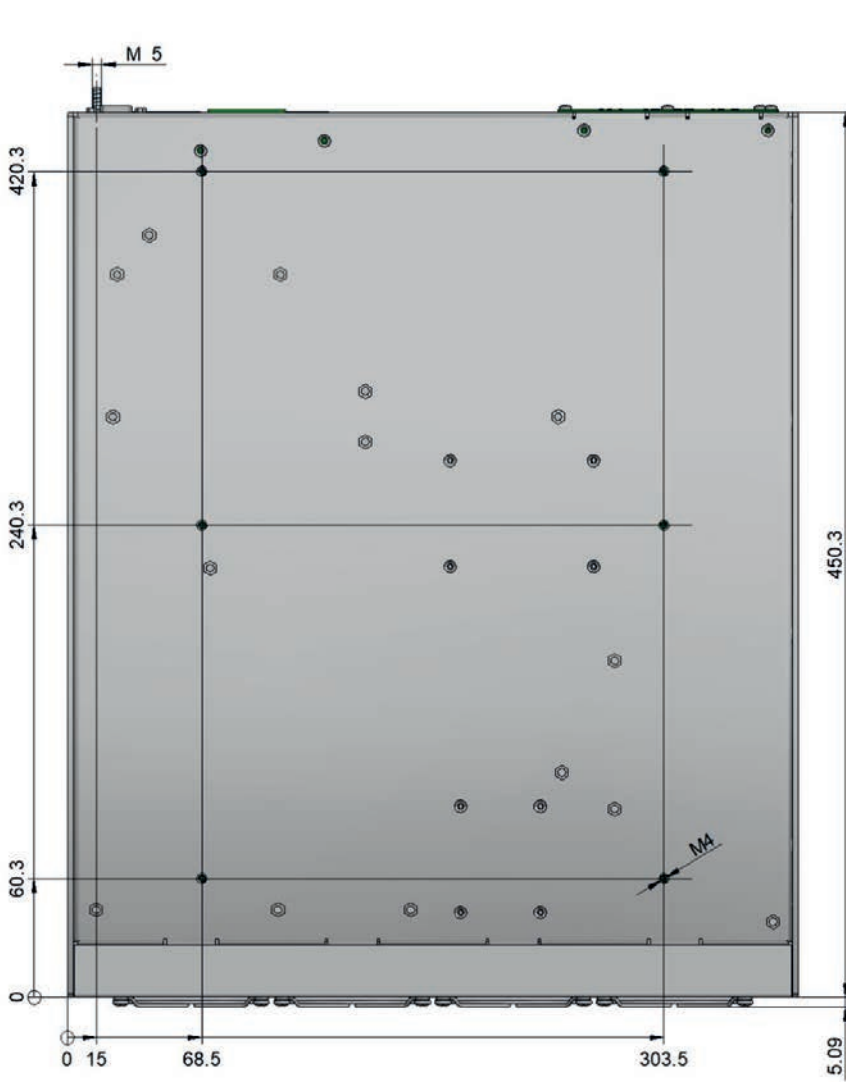



ACCESSORIES

Description	Notes	CODE
Mounting brackets kit	Contains two brackets and screws	9282

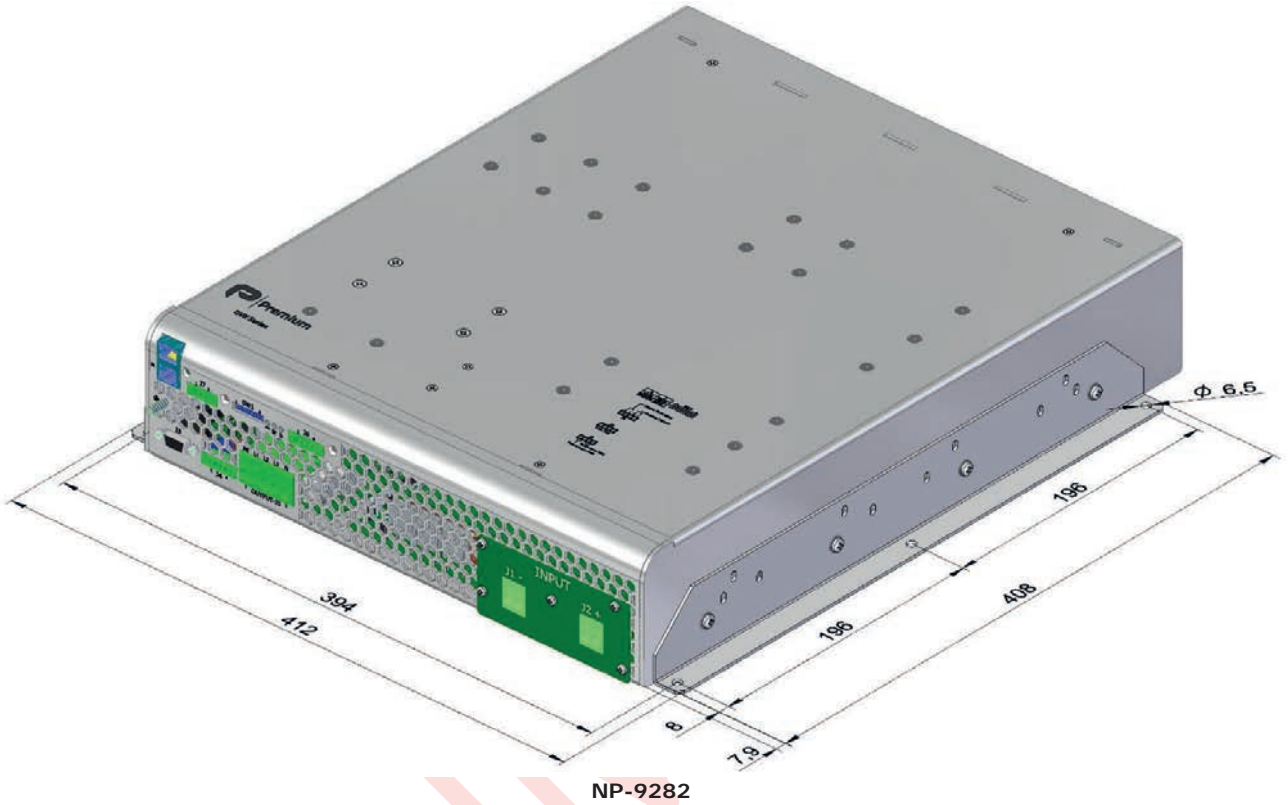

PRELIMINARY





EU, UKCA DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,
Address: C/ Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the product:

Type: DC/AC converter
Model: **OVX-6400**

is in conformity with the provisions of the following EU directive(s):

2014/35/EU SI 2016 No 1101	Low voltage / The electrical equipment (safety) regulations
2014/30/EU SI 2016 No 1091	EMC / Electromagnetic compatibility regulations
2015/863/EU SI 2012 No. 3032	RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment

and that standards and/or technical specifications referenced below have been applied:

EN50124-1:2017	Railway app. (Insulation coordination)
EN 62368-1: 2014	Safety. Audio/video, information and communication technology equipment
EN 61000-6-3: 2007	Generic emission standard
EN 61000-6-2: 2005	Generic immunity standard
IEC 61287-1: 2015	Railway applications. Power converters installed on board rolling stock
EN 50121-3-2: 2016	Railway applications. EMC Rolling stock equipment

* Optional, See annexe

CE marking year: **2022**; UKCA marking year: **2022**

Notes:

For the fulfilment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instructions manual or datasheet.

L'Hospitalet de Llobregat, 10-02-2022

Albert Sole
Technical Director

PREMIUM S.A. is an ISO9001 and ISO14001
certified company by Bureau Veritas



ANNEXE

Applicable values for the different sections of the norm 61287-1: 2015

4.2.2	Working altitude	Up to 2000m																																																																				
4.2.3	Ambient temperature	Class T3 inside vehicle compartment (-25 to 55°C full load) Class T3 Inside cubicle (55 to 70°C load < 62.5%)																																																																				
4.2.5	Shocks and vibrations	According EN61373:2010 Category 1 class B																																																																				
4.5.3.19	EMC Electromagnetic Compatibility EN50121-3-2:2016 IEC62236-3-2:2018	<table border="1"> <thead> <tr> <th>Test</th> <th>Norm</th> <th>Port</th> <th>Frequency</th> <th>Limits</th> </tr> </thead> <tbody> <tr> <td rowspan="3">Radiated emissions</td> <td rowspan="3">IEC55016</td> <td rowspan="3">Case</td> <td>30MHz...230MHz</td> <td>40dB(µV/m) Qpk at 10m</td> </tr> <tr> <td>230MHz...1GHz</td> <td>47dB(µV/m) Qpk at 10m</td> </tr> <tr> <td>1...3GHz</td> <td>Do not apply</td> </tr> <tr> <td></td> <td></td> <td></td> <td>3...6GHz</td> <td>Internal freq. < 108MHz</td> </tr> <tr> <td rowspan="2">Conducted emissions</td> <td rowspan="2">IEC55016</td> <td rowspan="2">Input</td> <td>150kHz...500kHz</td> <td>99dB(µV) Qpk</td> </tr> <tr> <td>500kHz...30MHz</td> <td>93dB(µV) Qpk</td> </tr> </tbody> </table>	Test	Norm	Port	Frequency	Limits	Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(µV/m) Qpk at 10m	230MHz...1GHz	47dB(µV/m) Qpk at 10m	1...3GHz	Do not apply				3...6GHz	Internal freq. < 108MHz	Conducted emissions	IEC55016	Input	150kHz...500kHz	99dB(µV) Qpk	500kHz...30MHz	93dB(µV) Qpk																																										
		Test	Norm	Port	Frequency	Limits																																																																
		Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(µV/m) Qpk at 10m																																																																
					230MHz...1GHz	47dB(µV/m) Qpk at 10m																																																																
					1...3GHz	Do not apply																																																																
					3...6GHz	Internal freq. < 108MHz																																																																
		Conducted emissions	IEC55016	Input	150kHz...500kHz	99dB(µV) Qpk																																																																
					500kHz...30MHz	93dB(µV) Qpk																																																																
		<table border="1"> <thead> <tr> <th>Test</th> <th>Norm</th> <th>Port</th> <th>Severity</th> <th>Conditions</th> <th>P</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Electrostatic discharge</td> <td rowspan="2">IEC61000-4-2</td> <td rowspan="2">Case</td> <td>±8kV</td> <td>Air (isolated parts)</td> <td rowspan="2">B</td> </tr> <tr> <td>±8kV</td> <td>Contact (conductive parts)</td> </tr> <tr> <td rowspan="4">Radiated high frequency</td> <td rowspan="4">IEC61000-4-3</td> <td rowspan="4">X/Y/Z Axis</td> <td>20V/m</td> <td>0.08...1.0GHz M. 80% 1kHz</td> <td rowspan="4">A</td> </tr> <tr> <td>10V/m</td> <td>1.4...2.1GHz M. 80% 1kHz</td> </tr> <tr> <td>5V/m</td> <td>2.1...2.5GHz M. 80% 1kHz</td> </tr> <tr> <td>3V/m</td> <td>5.1...6GHz M. 80% 1kHz</td> </tr> <tr> <td rowspan="3">Fast transients</td> <td rowspan="3">IEC61000-4-4</td> <td>Input</td> <td>±2kV</td> <td rowspan="3">Tr/Th: 5/50 ns</td> <td rowspan="3">A</td> </tr> <tr> <td>Output</td> <td>±2kV</td> </tr> <tr> <td>Signal</td> <td>±2kV</td> </tr> <tr> <td></td> <td></td> <td>PE</td> <td>±1kV</td> <td></td> <td></td> </tr> <tr> <td rowspan="2">Surge</td> <td rowspan="2">IEC61000-4-5</td> <td>Input L to L</td> <td>±1kV</td> <td rowspan="2">Tr/Th: 1.2/50µs</td> <td rowspan="2">B</td> </tr> <tr> <td>Input L to PE</td> <td>±2kV</td> </tr> <tr> <td rowspan="4">Conducted RF</td> <td rowspan="4">IEC61000-4-6</td> <td>Input</td> <td>10V</td> <td rowspan="4">0.15...80MHz M. 80% 1kHz</td> <td rowspan="4">A</td> </tr> <tr> <td>Output</td> <td>10V</td> </tr> <tr> <td>Signal</td> <td>10V</td> </tr> <tr> <td>PE</td> <td>10V</td> </tr> <tr> <td>Magnetic field</td> <td>IEC61000-4-8</td> <td>X/Y/Z Axis</td> <td>300A/m</td> <td>0Hz, 16.7Hz, 50/60Hz</td> <td>A</td> </tr> </tbody> </table>	Test	Norm	Port	Severity	Conditions	P	Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B	±8kV	Contact (conductive parts)	Radiated high frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A	10V/m	1.4...2.1GHz M. 80% 1kHz	5V/m	2.1...2.5GHz M. 80% 1kHz	3V/m	5.1...6GHz M. 80% 1kHz	Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A	Output	±2kV	Signal	±2kV			PE	±1kV			Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50µs	B	Input L to PE	±2kV	Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A	Output	10V	Signal	10V	PE	10V	Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A
		Test	Norm	Port	Severity	Conditions	P																																																															
		Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B																																																															
					±8kV	Contact (conductive parts)																																																																
		Radiated high frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A																																																															
					10V/m	1.4...2.1GHz M. 80% 1kHz																																																																
					5V/m	2.1...2.5GHz M. 80% 1kHz																																																																
3V/m	5.1...6GHz M. 80% 1kHz																																																																					
Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A																																																																	
		Output	±2kV																																																																			
		Signal	±2kV																																																																			
		PE	±1kV																																																																			
Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50µs	B																																																																	
		Input L to PE	±2kV																																																																			
Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A																																																																	
		Output	10V																																																																			
		Signal	10V																																																																			
		PE	10V																																																																			
Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A																																																																	
		P= Performance criteria, L= Line, PE= Protective Earth																																																																				
4.5.2.3	Tests list	<table border="0"> <tr> <td>1 Visual Inspection</td> <td>Routine</td> </tr> <tr> <td>2 Verification of size and tolerance</td> <td>Type</td> </tr> <tr> <td>3 Weight</td> <td>Type</td> </tr> <tr> <td>4 Marking inspection</td> <td>Routine</td> </tr> <tr> <td>5 Functional test on refrigeration system</td> <td>Type</td> </tr> <tr> <td>6 Sealing test</td> <td>N/A</td> </tr> <tr> <td>7 Grade protection test</td> <td>N/A</td> </tr> <tr> <td>8 Dielectric strength test</td> <td>Routine</td> </tr> <tr> <td>9 Resistance to isolation test</td> <td>Type</td> </tr> <tr> <td>10 Test for mechanical and electrical protection and for the measurement equipment</td> <td>N/A</td> </tr> <tr> <td>11 Low load test</td> <td>Type</td> </tr> <tr> <td>12 Switching test</td> <td>Routine</td> </tr> <tr> <td>13 Measurement of acoustic noise</td> <td>Routine</td> </tr> <tr> <td>14 Heating test</td> <td>Type</td> </tr> <tr> <td>15 Power loss test</td> <td>Type</td> </tr> <tr> <td>16 Power overvoltage test and energy transients</td> <td>Type</td> </tr> <tr> <td>17 Fast changes in load test</td> <td>Type</td> </tr> <tr> <td>18 Inspection of safety requirements</td> <td>Type</td> </tr> <tr> <td>19 Shock and vibration test</td> <td>Type</td> </tr> <tr> <td>20 EMC test</td> <td>Type</td> </tr> <tr> <td>21 Step in power line test</td> <td>Type</td> </tr> <tr> <td>22 Interruption of voltage supply test</td> <td>Type</td> </tr> <tr> <td>23 Current Sharing</td> <td>Type</td> </tr> </table>	1 Visual Inspection	Routine	2 Verification of size and tolerance	Type	3 Weight	Type	4 Marking inspection	Routine	5 Functional test on refrigeration system	Type	6 Sealing test	N/A	7 Grade protection test	N/A	8 Dielectric strength test	Routine	9 Resistance to isolation test	Type	10 Test for mechanical and electrical protection and for the measurement equipment	N/A	11 Low load test	Type	12 Switching test	Routine	13 Measurement of acoustic noise	Routine	14 Heating test	Type	15 Power loss test	Type	16 Power overvoltage test and energy transients	Type	17 Fast changes in load test	Type	18 Inspection of safety requirements	Type	19 Shock and vibration test	Type	20 EMC test	Type	21 Step in power line test	Type	22 Interruption of voltage supply test	Type	23 Current Sharing	Type																						
1 Visual Inspection	Routine																																																																					
2 Verification of size and tolerance	Type																																																																					
3 Weight	Type																																																																					
4 Marking inspection	Routine																																																																					
5 Functional test on refrigeration system	Type																																																																					
6 Sealing test	N/A																																																																					
7 Grade protection test	N/A																																																																					
8 Dielectric strength test	Routine																																																																					
9 Resistance to isolation test	Type																																																																					
10 Test for mechanical and electrical protection and for the measurement equipment	N/A																																																																					
11 Low load test	Type																																																																					
12 Switching test	Routine																																																																					
13 Measurement of acoustic noise	Routine																																																																					
14 Heating test	Type																																																																					
15 Power loss test	Type																																																																					
16 Power overvoltage test and energy transients	Type																																																																					
17 Fast changes in load test	Type																																																																					
18 Inspection of safety requirements	Type																																																																					
19 Shock and vibration test	Type																																																																					
20 EMC test	Type																																																																					
21 Step in power line test	Type																																																																					
22 Interruption of voltage supply test	Type																																																																					
23 Current Sharing	Type																																																																					